


Warning Pavers

Tactile Hazard/
Warning Concrete Pavers

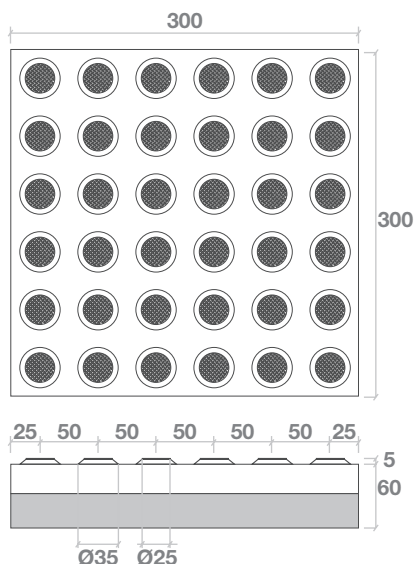

Product Specs

- Excellent Anti-Slip Rating
- 50MPa Concrete Pavers
- UV stable

Composition & Features

The Tactile Hazard/Warning Concrete Pavers are made from hard wearing 50MPa strength concrete and have been designed for safety and dignity, whilst providing superior durability in all substrates.

The pavers are designed to butt tight together because of the vertical walls of the paver meaning compliance to the standards below are adhered to. The Tactile Concrete Paver has proven its design and specifications in many harsh conditions and high foot traffic environments and is best suited for outdoor environments. All pavers are 300x300mm with various thickness options available.

Standards

The Tactile Hazard/Warning Concrete Pavers comply and exceed the requirements of:

- AS/NZS 1428.4.1:2009
- NZTA RTS14
- NZS 4121:2001
- AS/NZS 3661.1.1993
- AS/NZS 4586:2004

Types & Applications

- TP25HA – 25mm thickness. Best suited for light to medium foot traffic areas and installed into concrete substrates.
- TM40HA – 40mm thickness. Best suited for medium to heavy foot traffic, light vehicles and installed into asphalt and concrete substrates.
- TX60HA – 60mm thickness. Best suited for heavy foot traffic and vehicle movements and installed into concrete and paver substrates.

Colours

Yellow, Grey, White, Green, Terracotta, Charcoal



Other colours available on request.

5 year
warranty

P5 High Slip
Resistance
Stair Nosings
1.07 COF Slip Resistance



www.cmtgroup.co.nz Phone. 0800 147 433 Facsimile. 03 579 6337 Email. info@cmtgroup.co.nz

NZ Head Office. 12 Taylor Pass Road, Witherlea, Blenheim 7201

Auckland Depot. 62 Tidal Road, Mangere, Auckland 2022

Christchurch Depot. 101 Sturrocks Road, Casebrook, Christchurch 8051