Classic Tredfx

IKB439

Aluminium Safety Stair Nosing for Rebated Applications

This series has been developed to meet the growing demand for modern low-profile stair nosings. This range is designed to be rebated into the substrate so that the nosing is level with the surface of the stair. All profiles can be used internally or externally.

Specification Guide

Install IKB439 safety stair nosings, to stairs as required in accordance with manufactuer's recommendations and the requirements of NZS 4121 and AS/NZS 1428.4.1-2009. Available from: Total Tactilez, 0800 822 845, info@totaltactilez.co.nz

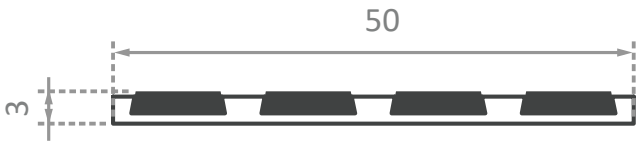

Features

- Grit insert
- Square back and front
- Interior and exterior use

Application:

Rebated - Timber/Tile

Length:

5850mm
(Cut-to-length service available)

Insert Colours: Black/Natural, Yellow/Natural, White/Natural, Black/Black

Aluminium Colours: Natural (standard), Black

Upon request Bronze, Saffron, Gold

P5 High Slip Resistance Stair Nosings
Up to P5 high Slip Resistance

5 Year Warranty

Installation Services Available

classic architectural group

TOTAL TACTILEZ Innovative Solution Providers

CMT GROUP

www.cmtgroup.co.nz | 0800 147 433 | info@cmtgroup.co.nz
NZ Head Office: 12 Taylor Pass Road, Witherlea, Blenheim 7201
Auckland Depot: 62 Tidal Road, Mangere, Auckland 2022
Christchurch Depot: 101 Sturrocks Road, Casebrook, Christchurch 8051